


# LENSGUARD 502

Brilliant Thinking → Innovative Coatings

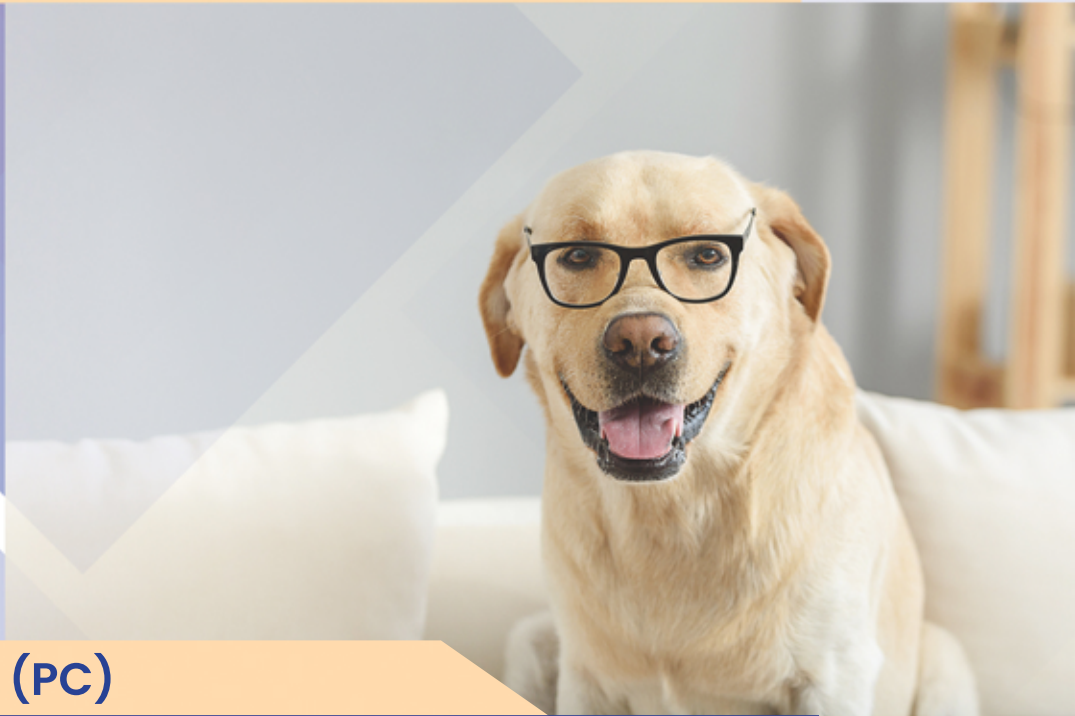

## TECHNICAL DATA (PC)

Bayer Ratio (a)	1.50
Steel Wool Scratch Resistance (b)	24 psi
Taber Abrasion Test (ASTM1044) (c)	PC: 100 cycles — 2.70 500 cycles — 4.25 PMMA: 100 cycles — 2.50 500 cycles — 3.50
Pencil Hardness Test (ASTM D 3363, modified) (d)	PC: 2H PMMA: 8H

(a) 500 g of abrasive media, 600 cycles

(b) steel wool #0000, 5 rotations, no scratch

(c) 500 g, CS 10 wheels

(d) Mitsu-Bishi Hi Uni pencils, Wolf-Wilburn Method — 1000 g @ 45 degrees

## CONTACT US



610-588-7900



[www.vueguard.com](http://www.vueguard.com)  
[sales@vueguard.com](mailto:sales@vueguard.com)



600 S Murray St.  
Bangor, PA 18013, USA